

# PowerScan™ RF

Industrial Bar Code Scanners



#### **Ideal for:**

- Warehousing and Shipping/Receiving
- Logistics and Transportation
- Outdoor Applications
- Retail POS

#### **Features:**

- Wireless operation up to 150' / 46 m away from the base station
- Operates up to 8 hours on a single charge
- Scanner & Base Station are IP54 rating for dust and wind-blown rain
- QuadraLogic™ II decoding software for superior scanning performance
- Multi-point operation allows for multiple scanner communications to a single base station

#### **A Tough Portable Tool for your Toughest Jobs.**

Freedom! Are restrictive interface cables keeping you from doing business the way you want? Are you restricted to scanning only in the 25' / 8 m area around your host terminal? Well, not anymore!

With the PSC PowerScan RF wireless scanner, you now have the freedom to go where the work is, not the other way around. Now you only have to take the 12.7 oz. / 363 g PowerScan RF scanner to the 500 lb. / 227 kg pallet; not the pallet to the scanner.

Utilizing the latest in Radio Frequency (RF) technology, the PowerScan RF has a range of up to 150' (46 m). This allows you the freedom to scan pallets at the other end of the loading dock or boxes at the end of a warehouse aisle up to 150' (46 m) from your fork truck. Its unique acknowledgment tone lets you know that your data transmission was successful. With multi-point capability the PowerScan RF allows you to assign multiple scanners to a single base station thereby increasing throughput and reducing the cost of additional base stations and host terminals.

The convenient base/docking station charges the battery every time the scanner is inserted. The PowerScan RF can operate up to 8 hours or more on a single charge of the battery pack. Changing the battery is a quick 5 second job. An optional four station battery charger lets you charge up to 4 battery packs at a time. The base station can be mounted on a counter, a wall or even a fork truck. The uniquely designed latch keeps the scanner in place even if your fork truck is going over floor grates or speed bumps.

#### **Built for Rugged Industrial Environments**


The Powerscan RF is based on the original PowerScan™ laser scanner, the first scanner designed from the ground up for rugged industrial use. The RF meets the same tough environmental standards such as an IP54 rating for dust and wind blown rain. And a drop specification of 30 six foot / 2 m drops to concrete!

All models of PowerScan RF have the same rugged features that have made PowerScan scanners the choice for tough industrial applications.

- High impact enclosure with protective rubber cushioning
- Frictionless scan mechanism with a limited lifetime warranty.
- Shock mounted optical components.
- Diamond-coated, shatter-proof window.
- Flash Memory for easy field upgrades.

#### **4 Different Models To Fit Your Needs**

If you need to read small, high density labels at 2' / 5 cm or reflective labels at 35' / 11 m up on the side of a warehouse storage rack, there is a model for you. The PowerScan RF models include High Density (HD), Standard Range (SR), Long Range (LR) and Extra Long Range (XLR). And every model is equipped with QuadraLogic™ II decoding software to read torn, disfigured and poorly printed labels.

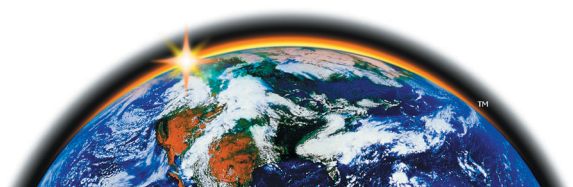

# Specifications

PowerScan™ RF

## PRODUCT

### Mechanical

#### Dimensions

Scanner: 9.4 x 4.0 x 2.8" / 23.8 x 10.2 x 7.0 cm  
 Base Station: 10.5 x 3.5 x 2.5" /  
 26.7 x 8.9 x 6.4 cm

**Weight** – Scanner: 12.7 ozs. / 363 g

### Optical

**Light source:** Extra Bright 650nm  
 Visible Laser Diode (VLD)

**Scan system:** Frictionless lifetime  
 flexure mechanism

**Rate:** 37 scans/sec. nominal

**Print contrast ratio:** 25% minimum

**Pitch:** ±65°

**Skew:** ±55°

#### Ambient light immunity

Artificial light: 1,200 foot candles  
 Sunlight: 10,000 foot candles

### Decoding Capability (autodiscriminates between)

- UPC/EAN/JAN
- Code 39
- Interleaved 2 of 5
- IATA 2 of 5
- MSI Plessey
- Code 128
- Code 93
- Standard 2 of 5
- Codabar
- EAN128

### Electrical

#### Voltage

Operating – Scanner: 2.4 VDC (NiMh batteries)

#### Operating current – nominal

Scanner: 200mA @ 2.45 VDC  
 (6000 scans per charge)

#### Input Power Requirements

Base Station – US: 110V ± 10%, 60 Hz;  
 Europe: 220V ± 10%, 50 HZ

**Battery Charge Time:** 4 hours (90%),  
 6 hours (100%)

### Communications

#### Host:

- RS232 Serial
- PC (XT, AT, PS2)
- USB Keyboard
- Universal Keyboard Wedge
- Wand Emulation
- IBM 46XX
- (supports over 2,000 PCs and Terminals)

#### Radio:

- Multi-point operation up to 8 scanners  
 to one base station
- Channels – 10 each, software selectable
- Range (high power) 150' (46 m) line of sight
- Frequency range (varies by country) –  
 902 MHz - 928 MHz;  
 433.05 MHz - 434.79 MHz

### Environmental

#### Temperature rating

Operating: 14° to 122° F / -10° to 50° C  
 Storage: -4° to 140° F / -20° to 60° C

**Humidity:** 5 to 95% non-condensing

#### Shock (at 23°C)

Scanner: multiple 6' (2 m) drops to concrete;  
 Base Station: multiple 4' (1 m) drops to concrete

**Vibration:** meets MIL-STD-810E

**Water & Dust:** IEC529 rating IP54DW

### Safety / Regulatory

**Electrical:** Complies to: TÜV; UL; cUL

**Emissions:** Complies to: FCC-A; EN 55022-B;  
 BCIQ CNS13438; AS/NZS 3548

**Laser classification:** CDRH Class II;

(CAUTION: Laser Radiation –

do not stare into beam);

IEC 60825 Class 2

Radio: ETSI-ETS-300 220;  
 FCC Part 15.249

(For a complete list of approvals by country  
 contact your PSC representative)



**Depth-of-Field Chart** – (printing resolution, contrast and ambient light dependent)

Label Density	Standard Range (decoded)	High Density (decoded)	Long Range (decoded, Code 39)	Extra Long Range (decoded, Code 39)
	Range	Range	Range	Range
Paper Labels	3 mil	1.0' to 2.0' / 2.5 to 5.1 cm		
	4 mil	1.0' to 3.0' / 2.5 to 8.0 cm		
	5 mil	0.8' to 3.8' / 2.0 to 10.0 cm		
	7.5 mil	3.0' to 6.0' / 9.0 to 15.0 cm	0.6' to 4.5' / 1.5 to 11.0 cm	8' to 13' / 20 to 33 cm
	10 mil	1.5' to 15.0' / 4.0 to 38.0 cm	0.2' to 5.5' / 0.5 to 14.0 cm	7' to 20' / 18 to 50 cm
	15 mil	1.0' to 25.0' / 2.5 to 64.0 cm		7' to 32' / 18 to 80 cm
	20 mil	1.0' to 35.0' / 2.5 to 89.0 cm		5' to 4' / 13 to 122 cm
	40 mil			8' to 7' / 20 to 213 cm
	55 mil	6.0' to 60.0' / 15.0 to 152.0 cm		15' to 9' / 38 to 274 cm
Reflective Labels	40 mil		22' to 8.3' / 56 to 254 cm	3.3' to 15.0' / 101 to 457 cm
	55 mil		30' to 12.0' / 76 to 366 cm	
	70 mil		3.3' to 15.0' / 101 to 457 cm	6.7 to 24.0' / 204 to 730 cm
	100 mil		3.8' to 22.0' / 116 to 671 cm	6.7 to 36.0' / 204 to 1097 cm

**Specifications are subject to change without notice.**

Additional information concerning this product or other PSC products  
 and services can be found at the PSC website: [www.pscnet.com](http://www.pscnet.com),  
 or contact your PSC representative for more information.



Switzerland • OPAL Associates AG • Motorenstrasse 116 • CH-8620 Wetzikon • Telefon +41 (0)1 931 12 22 • Telefax +41 (0)1 931 12 20 •  
 Email info@opal.ch • OPAL Associates SA • Avenue des Boveresses 54 • Case postale 29 • CH 1000 Lausanne 21 • Telefon +41 (0)21 653 95 00 •  
 Telefax +41 (0)21 653 95 02 • Email info@opalsa.ch • Germany • OPAL Associates GmbH • Lohnerhof-Str. 2 • D-78467 Konstanz  
 Telefon +49 (0)7531 813 000 • Telefax +49 (0)7531 813 00 99 • Email info@opalgmbh.de • OPAL Associates GmbH • Osterholder Allee 2 •  
 25421 Pinneberg • Telefon +49 (0)4101 787 615 • Telefax +49(0)4101 787 616 • Email hamburg@opalgmbh.de • Austria • OPAL Associates  
 GesmbH • Vorrarlberger Wirtschaftspark • A-6840 Götzis • Telefon +43 (0) 5523 58833 • Telefax +43 (0)5523 521569 • Email info@opalgmbh.at

